




FastWash


for
CONTINUOUS FROM PRESSES
(Narrow web)

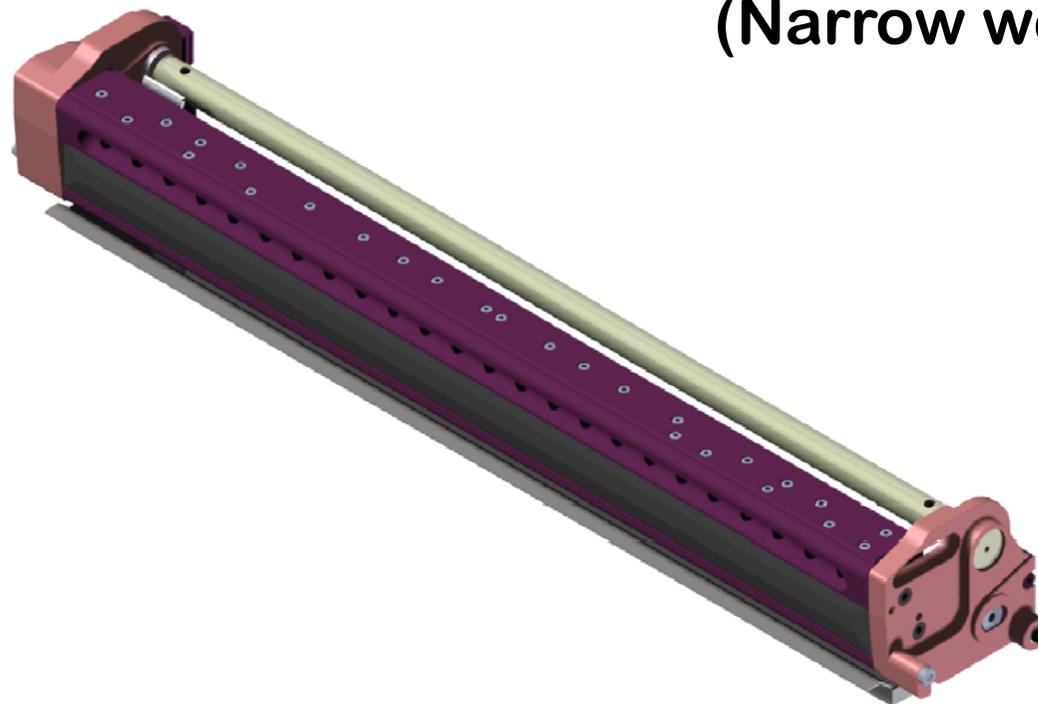

LAYOUT




Electropneumatic unit

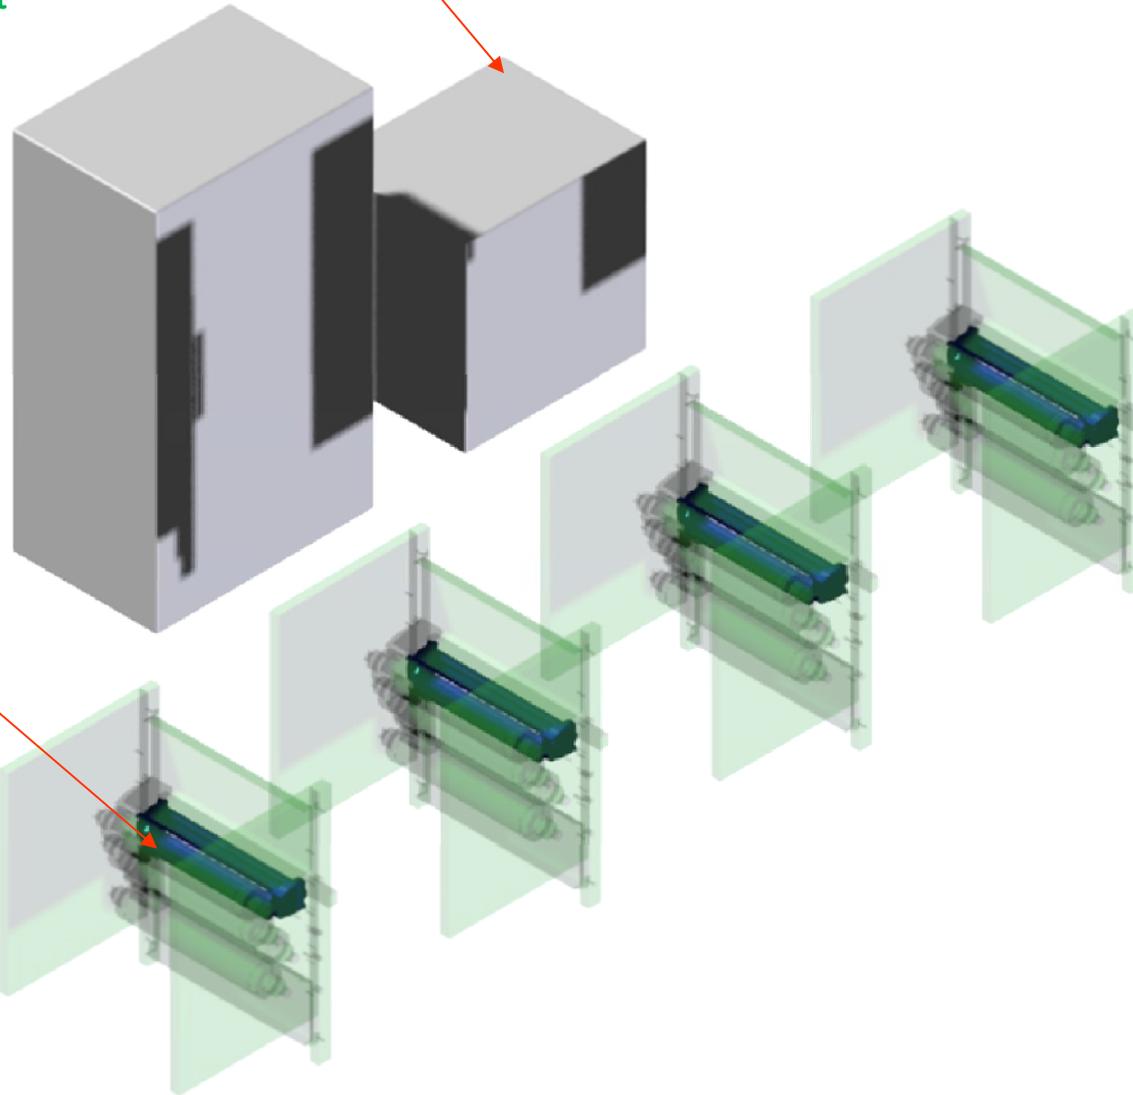


Blanket washer
FastWash





The Blanket washer element - FastWash

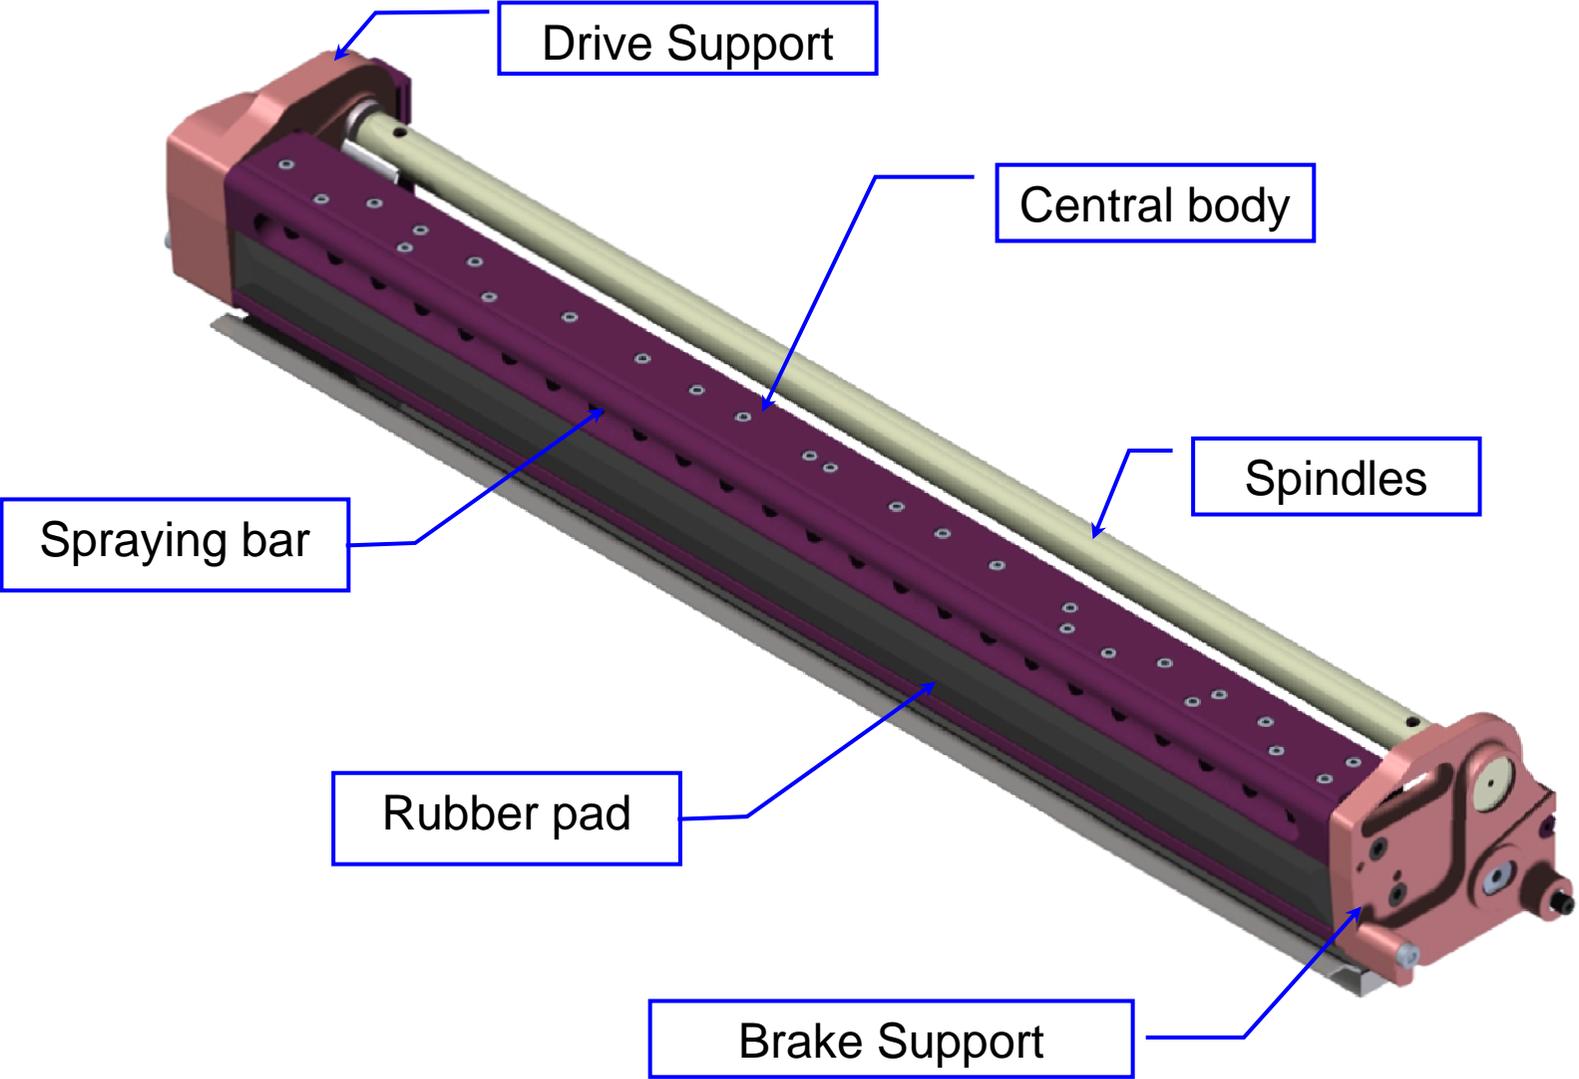



Spraying System

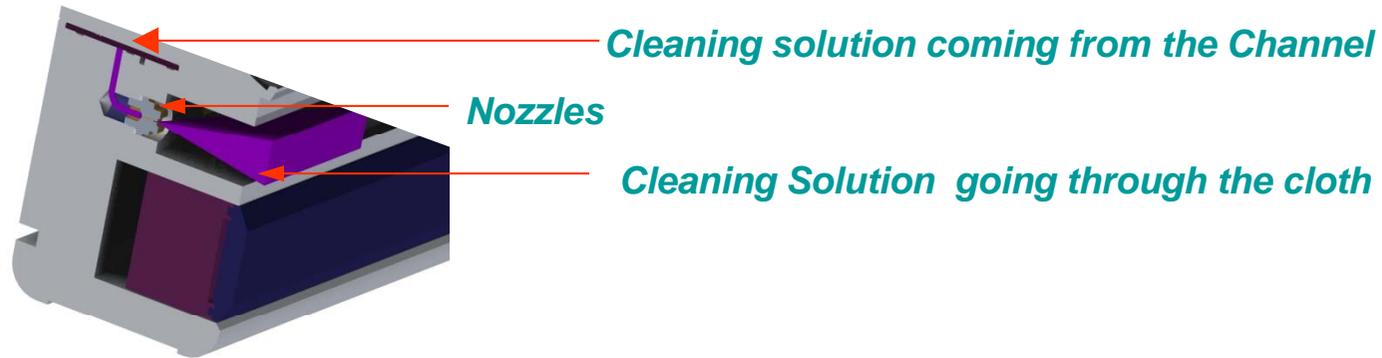


Distribution Channel

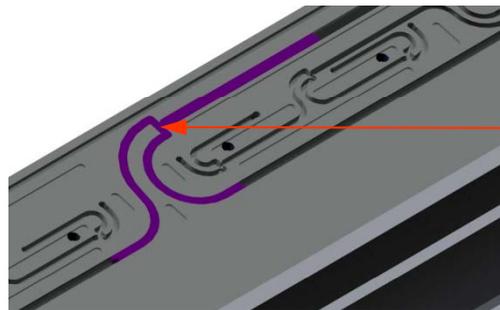


Nozzles

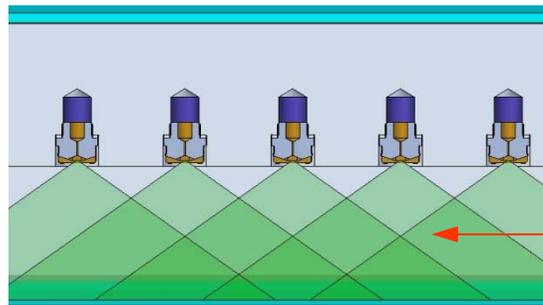

Rubber pad

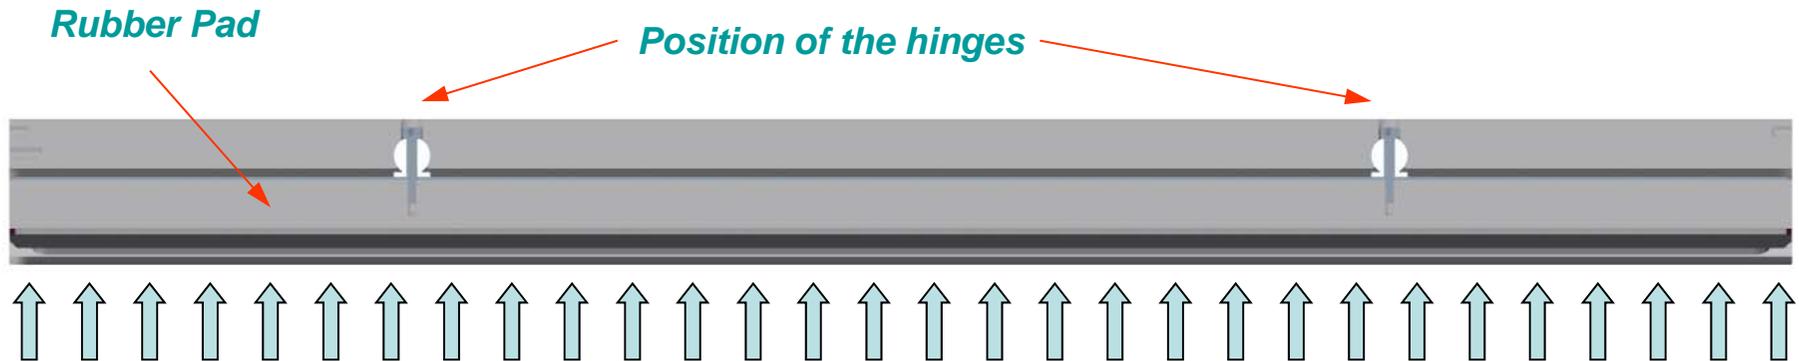



Self adjustment means constant application of load from the rubber pad to the blanket cylinder
NO ADJUSTMENT REQUIRED

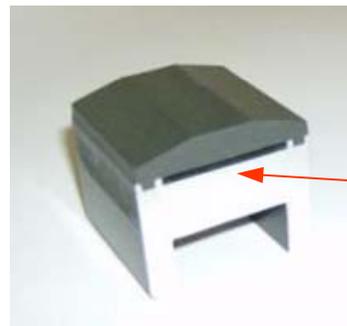

Air Bearing

In addition to the hinges works an air bearing which adjust the rubber pad to the blanket cylinder



Brake System

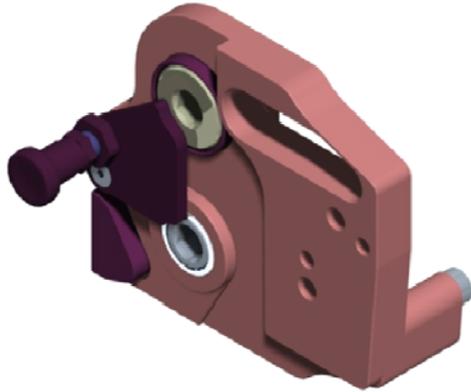

- Clutch for Tension the cloth
- Fully Gasket – No dirty can go inside

&

Cloth Movement system

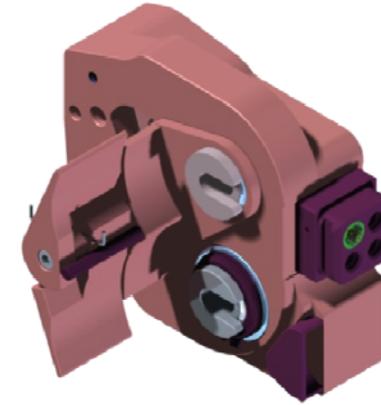

- Pneumatic Drag system
- Mechanical system for drive the cloth
- Switch for cloth reserve
- Plug for all the feedings
- Fully Gasket – No dirty can go inside

On the Field

